

Panasonic

CRAFT SKILL CO.,LTD.

PANA-TIG W/P

Thyristor Controlled
AC/DC Pulse
TIG Arc Welder

One Welder Operates
Like Nine Welders and Applicable
to Wide Variety of Welding.



Model
YC-300WP-5

www.Craft-Skill.com

Tel.0-2894-1750 (Auto)

High quality welding result with Pulse TIG welding for all applications.

● Initial current control



- To prevent burn through for thin plate welding. For confirmation of arc start point.




- To prevent incomplete penetration for thick plate welding.

● Up-slope time control

- To improve the weld quality at welding start by smooth changing from initial current to welding current with Up-slope time control.

● Pulse frequency control

- To change number of welding bead ripples and bead breadth.

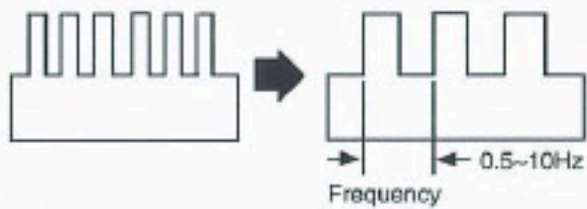


● Three kinds of crater treatment control

● Gas afterflow time control


● Pulse current control

- Able to choose any pulse current as you like.

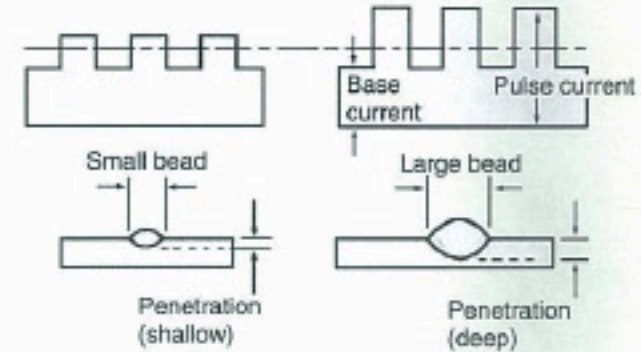


● Pulse ratio control

- Penetration control is easy, because it can control average current keeping strong and stable arc with pulse TIG welding.

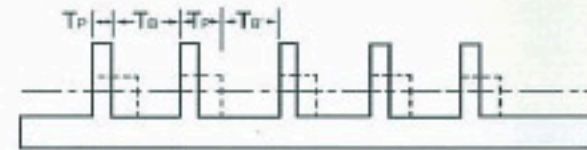


● Down-slope time control

- Smooth ending of welding with Down-slope time control.

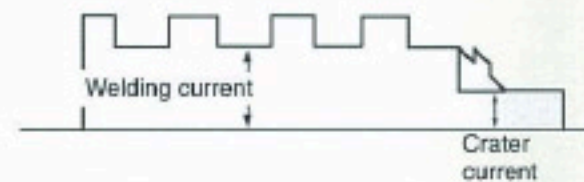

● Arc spot welding time control

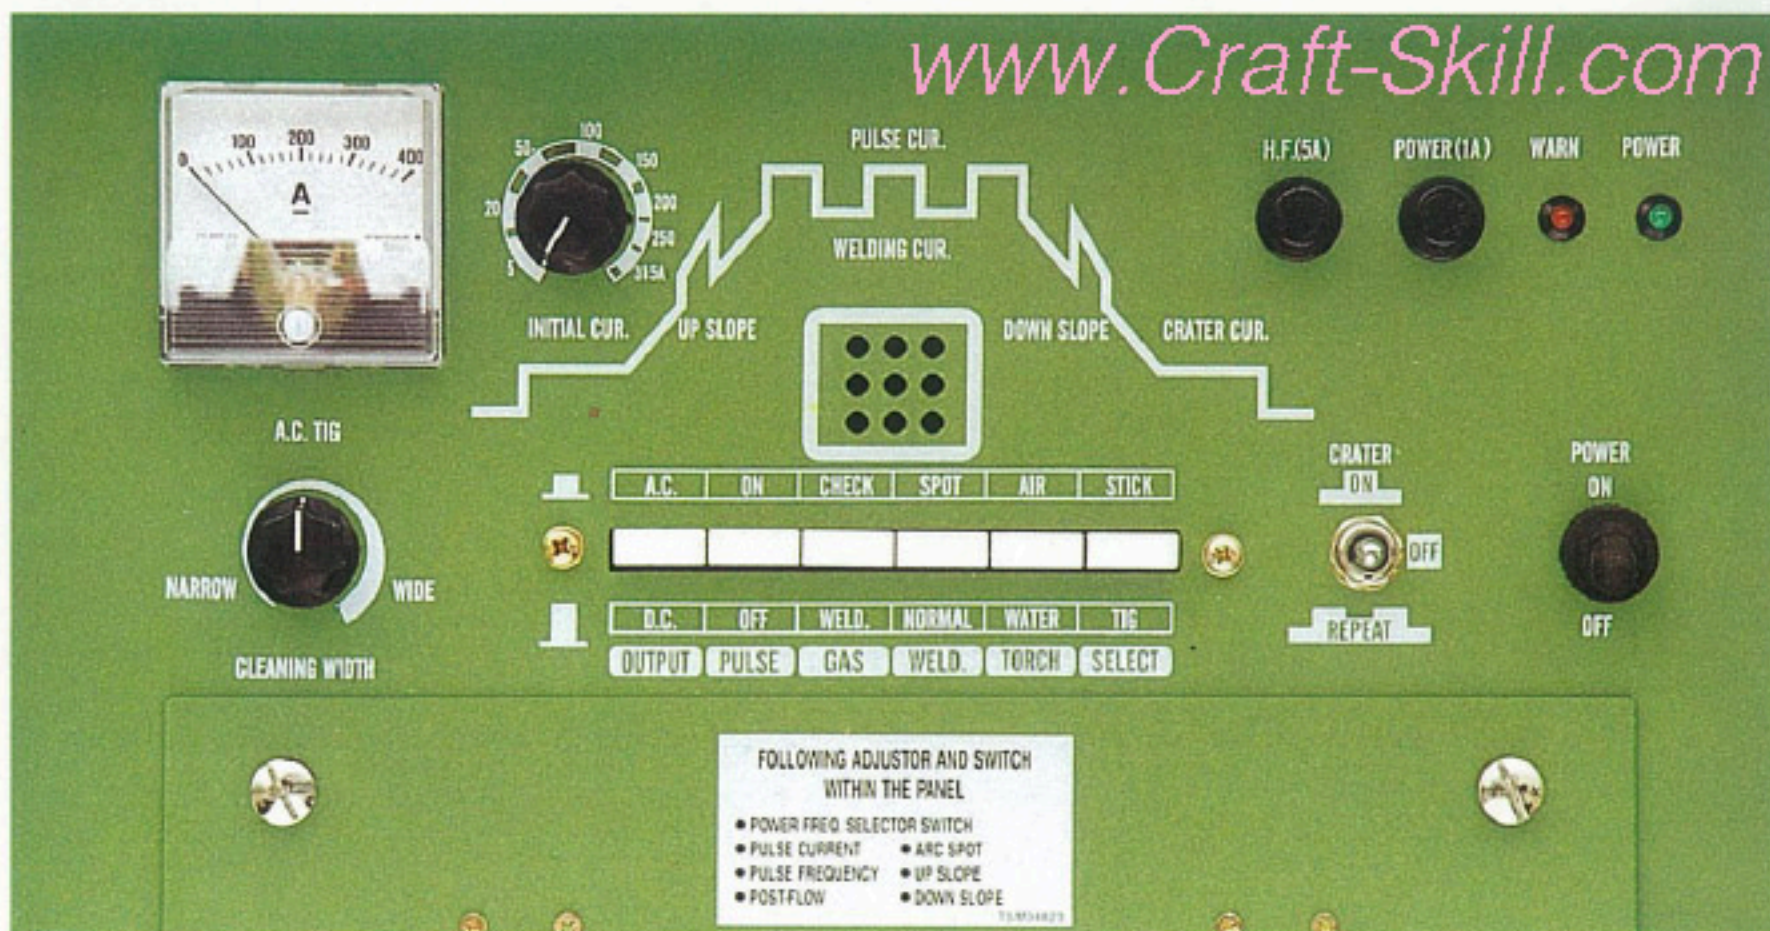

One class high ability with Multi-Purpose welding functions.




FEATURES

1. It has good output characteristics, stable arcing performance from the small current to rated current for welding of various thicknesses of plates, especially suitable for thin plates.




2. Very useful as power source for Butt welding of thick plate and pipe which needs high quality and penetration bead.

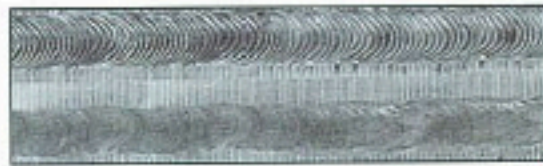

3. High quality welding, constant penetration and stable welding bead can be obtained by the good arc concentration.




4. Very easy to operate vertical welding, TIG filler welding operation, tack welding for thin plate and repeated short length welding, etc... by heat capacity control of pulse current. So, high efficiency welding can be done.

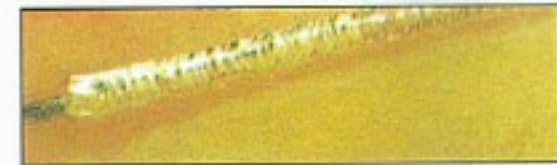


SPECIFICATIONS www.Craft-Skill.com

Rating		PANA-TIG	
		WP-300(with Pulse)	YC-300WP-5
Input	kVA	33.4/15.9(1φ50/60Hz)	
Duty cycle	%	35*	
DC no load voltage	V	70	
AC no load voltage	V	76	
DC output current	TIG	A	5~315
	Manual		5~315
DC output voltage	TIG	V	10.2~22.6
	Manual		20.2~32.6
AC output current	TIG	A	5~315
	Manual		5~315
AC output voltage	TIG	V	10.2~22.6
	Manual		20.2~32.6
DC initial&crater current(TIG)	A	5~315	
AC initial&crater current(TIG)	A	15~315	
Initial current control		Available when Crater control On or Repetition	
UP slope control time	sec.	0.0,1~6(Continuously)Adjustable to without control(by P.C.B)	
Down slop control time	sec.	0.0,2~10(Continuously)Adjustable to without control(by P.C.B)	
Gas pre-flow time	sec.	0.3	
Gas after-flow time	sec.	5~25(Continuously)	
Arc spot time adjustment	sec.	0.5~5(Continuously)	
Cleaning width adjustment		Adjustable with AC TIG welding	
Pulse frequency	Hz	0.5~10(Continuously)	
Dimensions(WxDxH)	mm	465 x 846 x 617	
Weight	kg	193	
Remote controller		YC-304URW(cable length 4m)	
Encloser standard		IP21S	

5. Fine treatment and increase the weld quality of welding start / finish with Up-slope control and Down-slope control.
6. Precisely controls the arc conditions for AC/DC manual welding of stainless-steel, special steel such as Cr-Mo steel by means of refined electronics techniques so that optimum dynamic characteristics can be obtained.
7. By using cleaning width adjustor, more oxide can be effectively removed at low welding current while the loss of tungsten electrode can be reduced at high welding current.

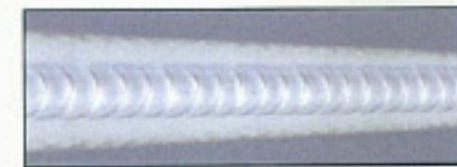

8. Equipped with advanced reactor control technology, its AC square wave output becomes very stable and stability is thus enhanced considerably, thereby high welding quality is obtainable.

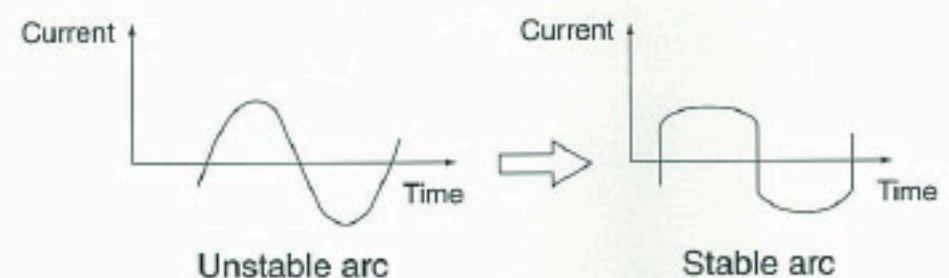

The * mark shows in case of DC manual welding, DC TIG welding and AC TIG welding which is adjusted to [WIDE] side of cleaning width control. Please inform us of primary voltage.

Please Use in Combination with Following Equipment

TIG WELDING TORCH

High durable against heat.
Perfectly airtight and watertight.
Small, light and easy to manipulate.



YT-208T

ARGON GAS REGULATOR WITH FLOW METER

For reducing pressure of Argon in high pressure gas cylinder to the proper secondary pressure and for adjusting flow rate.

Max Pressure 200 kg/cm²
Flow rate range 1~25 /min



YX-251A

MODELS AND RATINGS

Model		YT-158THAE	YT-158THAF	YT-208THAE	YT-208THAF	YT-308TWHAJ	YT-308TWHAK
Cable length	m	4	8	4	8	4	8
Rated current	DC	150		200		300	
	AC	130		160		260	
Duty cycle (10min.)	%	50		50		100	
Usable electrode dia () option	mmφ	1.0, 1.6 (2.0), (2.4)		(1.0), 1.6, (2.0) 2.4, (3.2)		(1.0), (1.6), (2.0) 2.4, 3.2, (4.0)	
	mmφ	6.5, 8 (9.5), (11)		(6.5), 8 9.5, (11)		(6.5), (8) 9.5, 11	
Usable nozzle dia () option	mmφ	6.5, 8 (9.5), (11)		(6.5), 8 9.5, (11)		(6.5), (8) 9.5, 11	
Cooling water flow rate	L/min	-		-		0.7	
Weight (approx.)	kg	1.2	2.0	2.0	3.2	1.6	3.0
Cooling Method		Air		Air		Water	

* Pistol type **Cooling water flow rate 0.7l/min pressure 1.0~3.0 kg/cm²



COOLING WATER TANK

YX-09KBA1



REMOTE CONTROLLER

YC-304URW

Optional Nozzles for TIG Welding

www.Craft-Skill.com

NOZZLE WITH GASLENS




It can keep stable gas shielding

Usable Torch	Caliber	
	9.5mmφ	12.7mmφ
YT-208T	Parts NO.	Parts NO.
YT-308TW	TGN 00908	TGN 01218


* Use in combination with Collet body w/gas lens and adaptor

BIG CALIBER NOZZLE




Usable Torch	Caliber		
	12.7mmφ	16mmφ	19mmφ
YT-158T	Parts NO.	Parts NO.	Parts NO.
YT-208T	TGN 01220	TGN 01674	TGN 01934
YT-308TW			

LONG NOZZLE



Usable Torch	Caliber	
	8mmφ	11mmφ
YT-158T	Parts NO.	Parts NO.
YT-208T	TGN 00816	TGN 01106
YT-308TW		

ARC SPOT NOZZLE

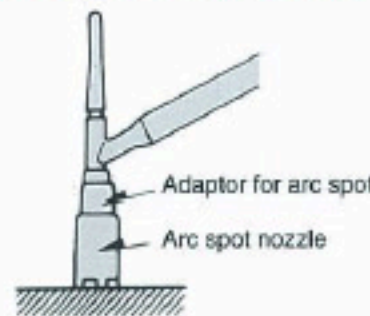


Usable Torch	Caliber	
	Arc Spot Nozzle	Parts NO.
YT-158T	Parts NO.	
YT-208T	TGN 01809	
YT-308TW		

* Use in combination with adaptor for Arc Spot.

Electrodes for TIG Welding

A little consume of electrode, good arc startability and stability. Increase the working efficiency of TIG welding.

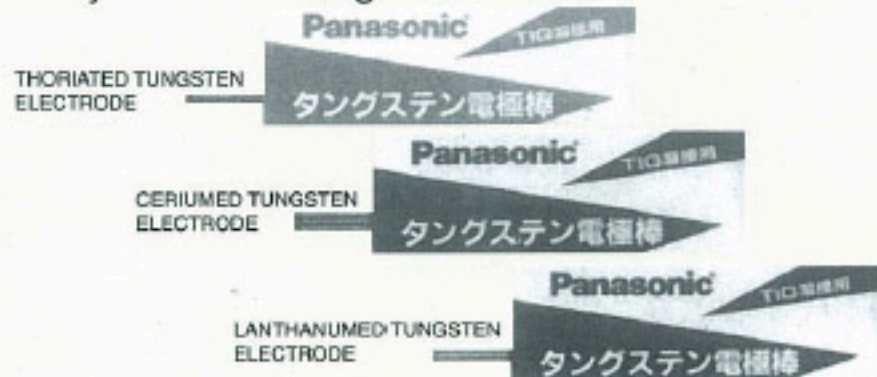

2% Thoriated tungsten electrode (DC TIG)	2% Ceriumed tungsten electrode (AC/DC TIG) Low consumption Nonradioactive	2% Lanthanumed tungsten electrode (DC TIG) Low consumption Nonradioactive	Size (mm)	
			Dis.	Length
YN-05T2S	-	-	0.5	150
YN-10T2S	YN-10L2S	YN-10L2S	1.0	150
YN-16T2S	YN-16L2S	YN-16L2S	1.6	150
YN-20T2S	YN-20L2S	YN-20L2S	2.0	150
YN-24T2S	YN-24L2S	YN-24L2S	2.4	150
YN-30T2S	-	YN-30L2S	3.0	150
YN-32T2S	YN-32L2S	YN-32L2S	3.2	150
YN-40T2S	YN-40L2S	YN-40L2S	4.0	150
YN-48T2S	YN-48L2S	YN-48L2S	4.8	150

Extension Cable

Applicable torch	Cable Length	5m	10m	15m
		Air	YT-158T	TWU15125
Cooling	YT-208T	TWU20131	TWU20132	TWU20133
	Water	YT-308TW	TWU30132	TWU30133
Cooling	YT-50T5W1	TWU50137	TWU50138	TWU50139

Panasonic
Welding Machine

CRAFT SKILL CO., LTD.

Tel.0-2894-1750 (Auto)